

### Features

- ARM Dual Core Cortex A55 processor up to 1.7GHz
- ARM Cortex®-M33 run up to 250 MHz for real-time and low-power processing.
- NPU for Machine learning capability to 0.5TOPS
- Form factor: 100x72mm, Pico-ITX
- Memory support: from 128MB to 2GB
- Multi-Media support: 1x MIPI DSI w/1080p60, 1x LVDS w/720p60, 1x 1080P60 MIPI CSI for camera
- Power Supply via USB-C PD, 9V/12V/15V
- Multi-OS platform support: Linux, Windows
- Use the LVGL Rich Library design a user-friendly interface for easy and intuitive operation

### Introduction

MBP-NX93, a cutting-edge Pico-ITX board powered by NXP i.MX93 Application Processor. Featuring an ARM Dual Core Cortex A55 processor up to 1.7GHz and an ARM Cortex®-M33 running up to 250MHz, it offers exceptional performance for real-time and low-power processing. With built-in 0.5TOPS NPU enables advanced AI applications.

MBP-NX93 supports both Linux and Windows with LVGL Library design a user-friendly interface for easy and intuitive operation, offering a versatile development platform. Linux provides robust multitasking capabilities and extensive software support. With LVGL plentiful Library delivers real-time performance and an efficient and friendly graphical interface for resource-constrained environments for intuitive operation. It also supports 1080p60 MIPI DSI, 720p60 LVDS, and 1080p60 MIPI CSI for multimedia applications. Powered via USB-C PD (9V/12V/15V), it ensures efficient power management. The connectivity I/O are included 4x USB 2.0 HS, 1 x USB Type-C OTG, 4x UART, 6x GPIO and 1x external Micro SD Slot for storage, it is wonderful suitable for embedded applications.


MBP-NX93 is Ideal for industrial automation, smart home devices, AI-driven edge computing. It excels in monitoring and controlling machinery in automation, enhancing smart home experiences, and enabling intelligent edge devices like surveillance cameras and facial recognition systems.

### Specification


|                       |           |   |
|-----------------------|-----------|---|
| System                | Processor | ARM Dual Core Cortex A55 processor, up to 1.7GHz                            |
|                       | RAM       | LPDDR4, from 128MB to 2GB   |
|                       | Storage   | 8G/16GB/32GB eMMC   |
|                       | Display   | MIPI DSI w/1080p60, LVDS w/720p60   |
|                       | Touch     | Support via USB/I2C Touch controller  |
|                       | Camera    | 1x MIPI CSI, 1080P60  |
|                       | Ethernet  | 2x 10/100/1000M Gigabit Ethernet  |
| I/O Interface         | USB Port  | 4x USB 2.0 HS (2x USB Type A, 2x 4-Pin header);<br>1 x USB Type-C for Debug |
|                       | UART      | 4   |
|                       | GPIO      | Support 6x GPIO (I2C/UART)  |
|                       | RTC       | Support, via 1x PH 1.25mm   |
|                       | SD Socket | 1x Micro SD slot (on the rear side)   |
| Power Input           |           | via USB-C PD, 9V/12V/15V  |
| Form Factor           |           | 100x 72mm, Pico-ITX   |
| Operating Temperature |           | -10°C ~ 70°C  |
| Operating System      |           | Windows, Linux with LVGL  |




## Dimension(mm)

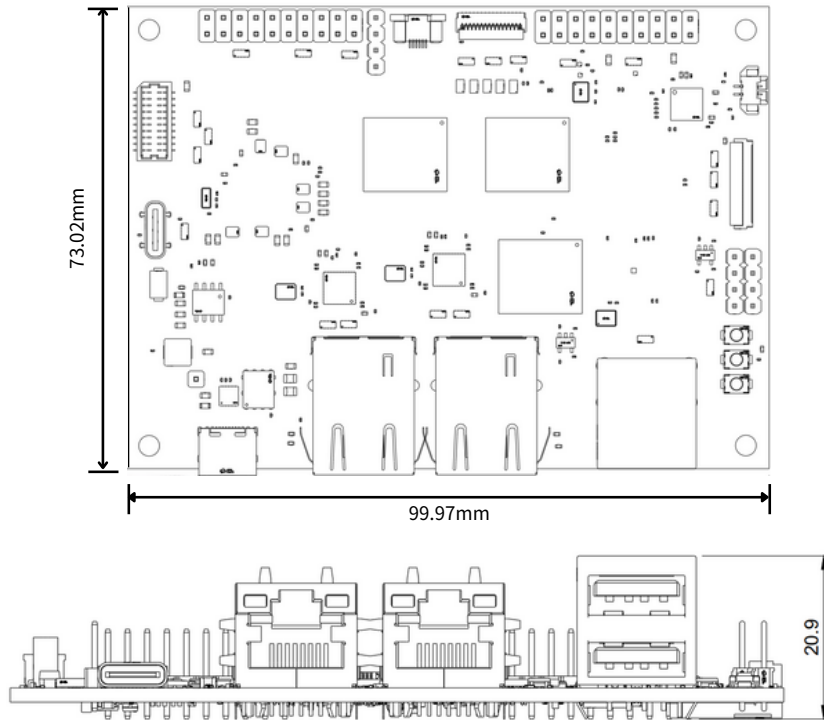


## Block Diagram

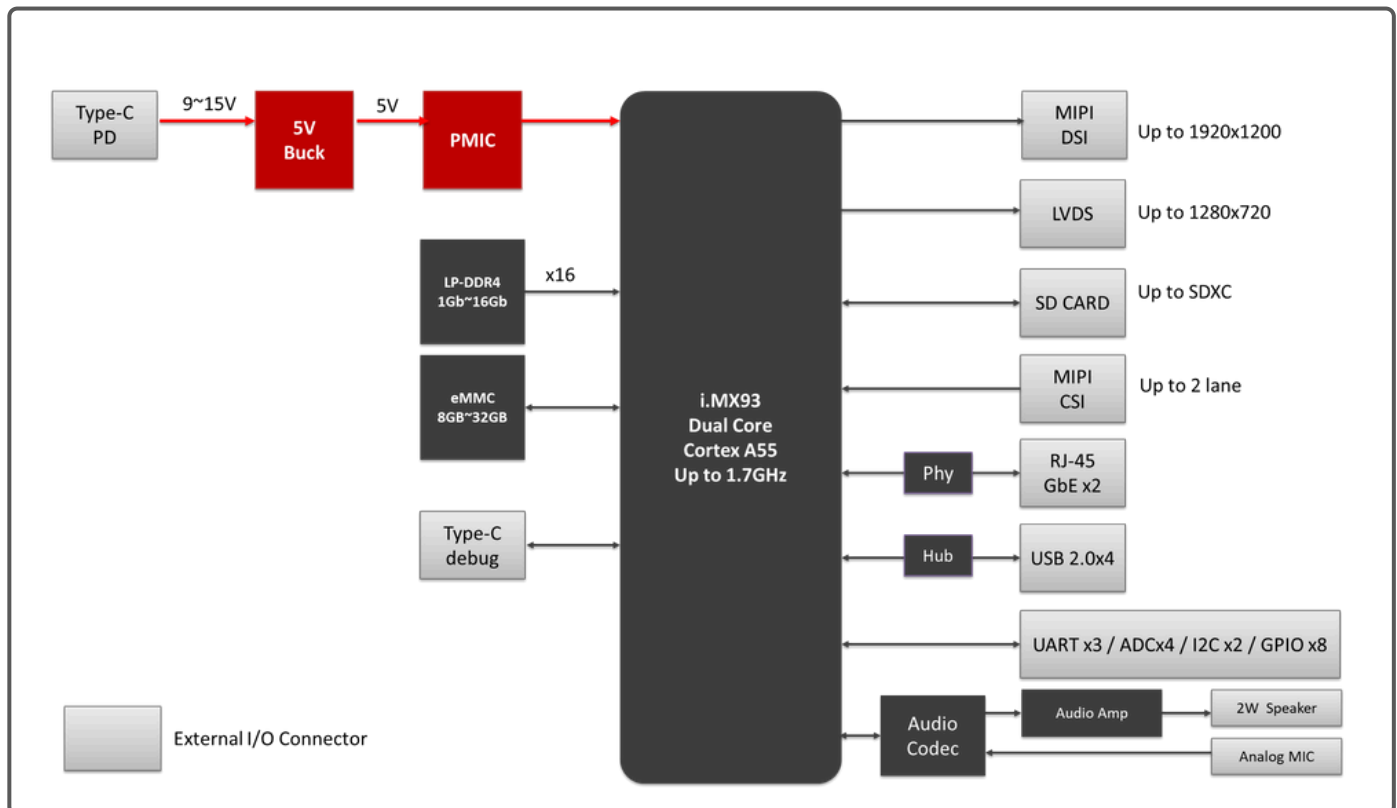

## I/O Briefing

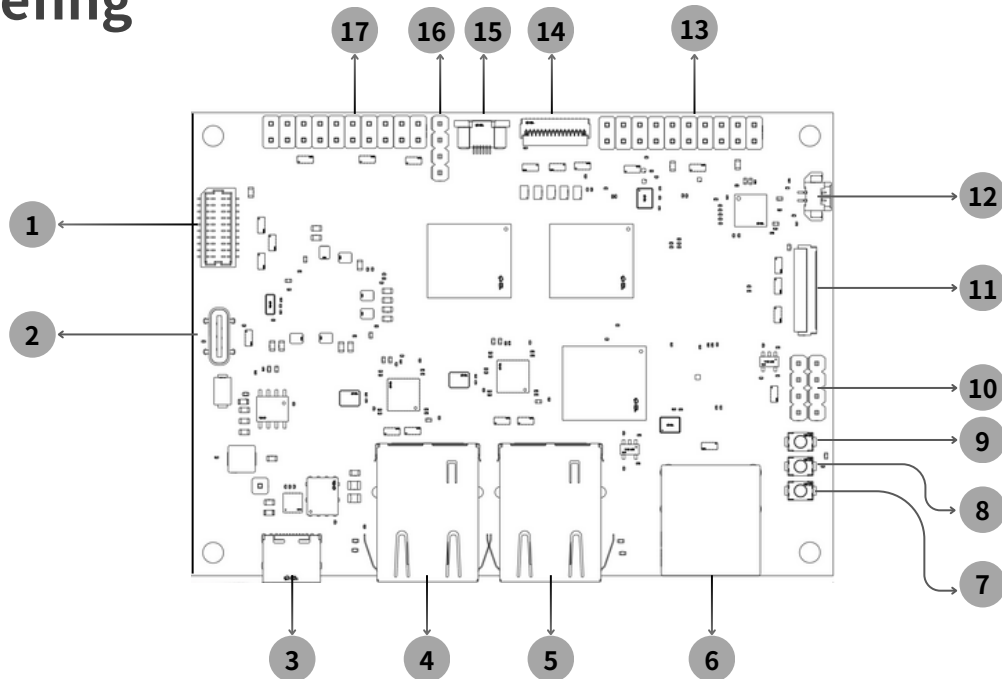

- |                                |                  |
|--------------------------------|------------------|
| ① CN1: LVDS                    | ⑭ FPC1: MIPI DSI |
| ② USB Type-C for Debug         | ⑮ FPC2: Touch    |
| ③ USB-C PD for 9~15V           | ⑯ H3: UART       |
| ④ ETH1                         | ⑰ J2: ADC&GPIO   |
| ⑤ ETH2                         |                  |
| ⑥ USB:2x USB 2.0 Type A        |                  |
| ⑦ SW1:Force Download Mode      |                  |
| ⑧ SW3: ON/OFF Button           |                  |
| ⑨ SW2: Reset Button            |                  |
| ⑩ USB3&4: 2x USB 2.0 HS HOST   |                  |
| ⑪ FPC3: MIPI CSI               |                  |
| ⑫ SPK1: 4 OHM MONO Speaker Out |                  |
| ⑬ J1: UART & GPIO              |                  |

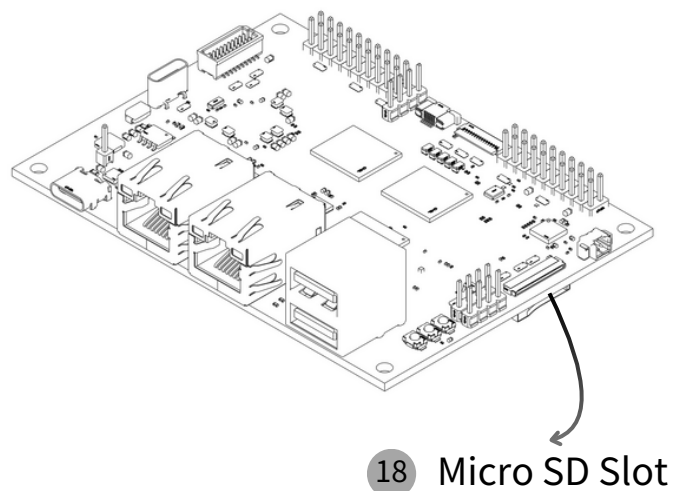

⑱ Micro SD Slot


# MBP-NX93

- 1 CN1: LVDS Connector  
2x10-Pin Box Header, 1.0mm



| PIN | Assignment | PIN | Assignment |
|-----|------------|-----|------------|
| 1   | VOUT=PD IN | 2   | 5V OUT     |
| 3   | VOUT=PD IN | 4   | 5V OUT     |
| 5   | LVDS CLKp  | 6   | LVDS D2p   |
| 7   | LVDS CLKn  | 8   | LVDS D2n   |
| 9   | GND        | 10  | GND        |
| 11  | LVDS D0p   | 12  | LVDS D3p   |
| 13  | LVDS D0n   | 14  | LVDS D3n   |
| 15  | GND        | 16  | GND        |
| 17  | LVDS D1p   | 18  | PWM        |
| 19  | LVDS D1n   | 20  | EN         |

- 9 USB 3&4: 2 x USB 2.0 HS HOST  
1x4-Pin Header, 2.54mm pitch




| PIN | Assignment |
|-----|------------|
| 1   | 5V OUT     |
| 2   | USB D-     |
| 3   | USB D+     |
| 4   | GND        |

- 11 FPC3: MIPI CSI  
1x24-Pin FPC Connector, 0.5mm




| PIN | Assignment     | PIN | Assignment |
|-----|----------------|-----|------------|
| 1   | NC             | 13  | XCLK       |
| 2   | AGND           | 14  | CSI_D1n    |
| 3   | I2C-SDA        | 15  | GND        |
| 4   | AVDD(3.3V)     | 16  | CSI_CKp    |
| 5   | I2C-SCL        | 17  | NC         |
| 6   | RESET          | 18  | CSI_CKn    |
| 7   | NC             | 19  | NC         |
| 8   | POWER DOWN     | 20  | CSI_D0p    |
| 9   | NC             | 21  | NC         |
| 10  | DVDD (1.5V)    | 22  | CSI_D0n    |
| 11  | DOVDD(3.3/1.8) | 23  | AF-VDD     |
| 12  | CSI_D1p        | 24  | VF-VSS     |

- 12 SPK1: 4 OHM MONO Speaker Out  
1x2-Pin 1.25mm connector



| PIN | Assignment |
|-----|------------|
| 1   | SPK+       |
| 2   | SPK-       |

- 13 J1:UART & GPIO  
1, 2x10-Pin Header, 2.54mm pitch

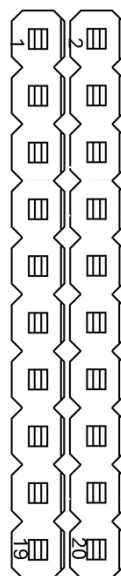

| PIN | Assignment | PIN | Assignment |
|-----|------------|-----|------------|
| 1   | 5V OUT     | 2   | 5V OUT     |
| 3   | UART1 RX   | 4   | GPIO00     |
| 5   | UART1 TX   | 6   | GPIO01     |
| 7   | GND        | 8   | GND        |
| 9   | 5V OUT     | 10  | 5V OUT     |
| 11  | UART2 RX   | 12  | GPIO02     |
| 13  | UART2 TX   | 14  | GPIO21     |
| 15  | GND        | 16  | GND        |
| 17  | 3.3V OUT   | 18  | 3.3V OUT   |
| 19  | 3.3V OUT   | 20  | 3.3V OUT   |

## 14 FPC1: MIPI DSI


1x31-Pin FFC Connector, 0.3mm pitch  
FH35C-31S-0.3SHW(50)



| PIN | Assignment | PIN | Assignment |
|-----|------------|-----|------------|
| 1   | LED_A      | 2   | LED_A      |
| 3   | LED_A      | 4   | NC         |
| 5   | LED_K      | 6   | LED_K      |
| 7   | LED_K      | 8   | LED_K      |
| 9   | GND        | 10  | GND        |
| 11  | MIPI D2p   | 12  | MIPI D2n   |
| 13  | GND        | 14  | MIPI D1p   |
| 15  | MIPI D1n   | 16  | GND        |
| 17  | MIPI CLKp  | 18  | MIPI CLKp  |
| 19  | GND        | 20  | MIPI D0p   |
| 21  | MIPI D0n   | 22  | GND        |
| 23  | MIPI D3p   | 24  | MIPI D3n   |
| 25  | GND        | 26  | 1.8V       |
| 27  | RESET      | 28  | GND        |
| 29  | 1.8V       | 30  | 3.3V       |
| 31  | 3.3V       |     |            |

## 15 FPC2: Touch

1x6-Pin FFC Connector, 0.5mm



| PIN | Assignment |
|-----|------------|
| 1   | GND        |
| 2   | TP_INT     |
| 3   | TP_RET     |
| 4   | 3.3V       |
| 5   | I2C2_SDA   |
| 6   | I2C2_SCL   |

## 16 H3: UART


1x4-Pin Header, 2.54mm pitch



| PIN | Assignment |
|-----|------------|
| 1   | 5V OUT     |
| 2   | UART3 RX   |
| 3   | UART3 TX   |
| 4   | GND        |

## 17 J2:ADC & GPIO

1, 2x10-Pin Header, 2.54mm pitch



| PIN | Assignment | PIN | Assignment |
|-----|------------|-----|------------|
| 1   | 5V         | 2   | 3.3V       |
| 3   | GPIO3_30   | 4   | GND        |
| 5   | GPIO3_29   | 6   | ADC0       |
| 7   | GPIO3_28   | 8   | GND        |
| 9   | GPIO3_31   | 10  | ADC1       |
| 11  | GND        | 12  | GND        |
| 13  | 3.3V       | 14  | ADC2       |
| 15  | GPIO12     | 16  | GND        |
| 17  | GPIO13     | 18  | ADC3       |
| 19  | GND        | 20  | GND        |